



Part Numbers	Specifications	Applications	Features	Options
6401765 FOUR SPEED	WIDTH 350 mm 900 m³/h 12V	HVAC Systems	High Pressure Silent Operation High Efficiency	PWM Speed Control EMC (Certified) Thermal Protector (LL) Long Life Version

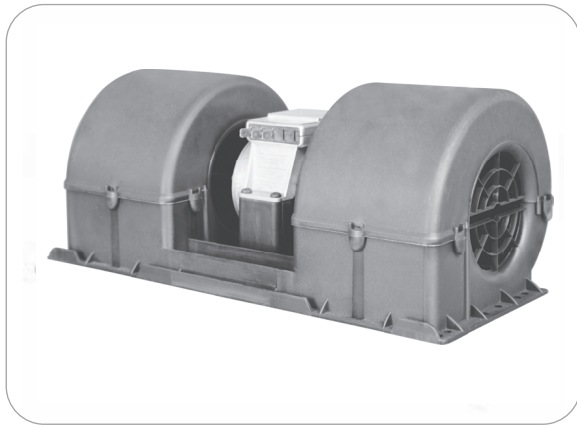


Test Voltage	V	13,0
Nominal Current	A	14,0
Nominal Speed	rpm	3.250
Max. St. Pressure	mmH ₂ O	46,0
Max. Airflow	m ³ /h	860
Weight	kg	2,2
Airflow Rates	%	100-81-70-47

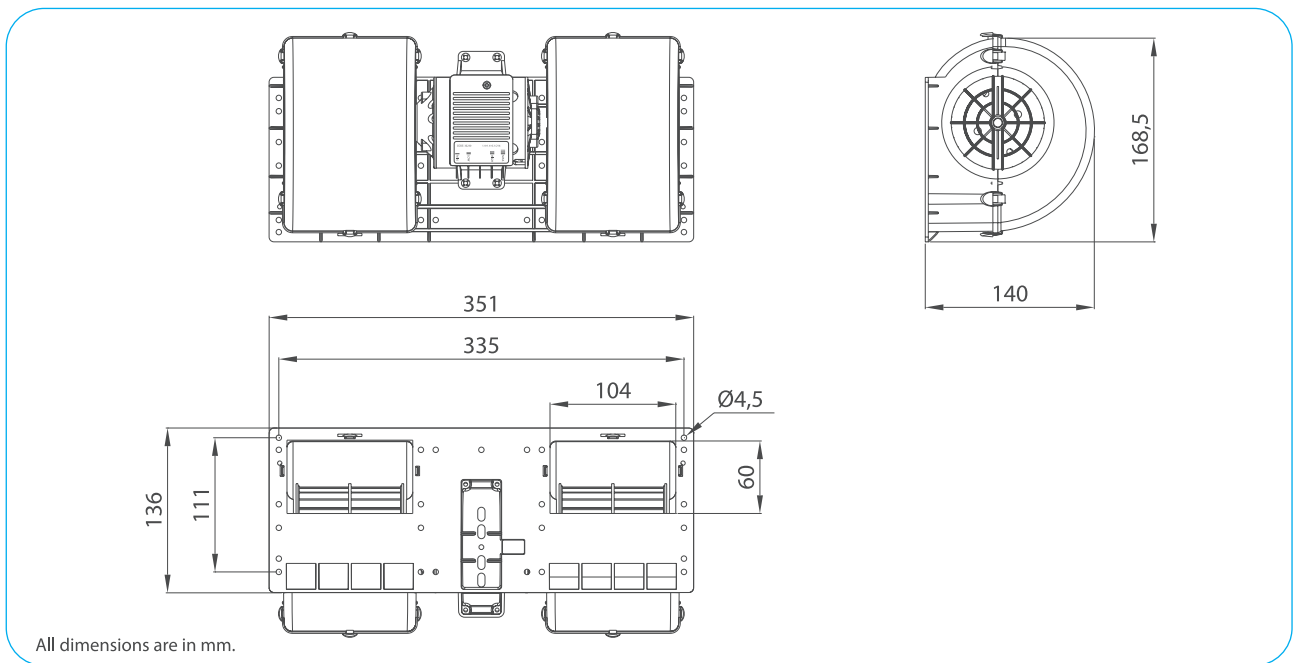

All dimensions are in mm.

TEST VOLTAGE = 13,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H ₂ O	m ³ /h	A
	0,0	860,0	13,8
	5,0	795,6	13,1
	10,0	739,2	12,5
	15,0	694,7	11,9
	20,0	656,1	11,4
	25,0	591,2	10,5
	30,0	457,8	8,8
	35,0	287,2	6,8
40,0	145,3	5,7	
46,3	0,0	5,1	

Static Pressure: 1 mm H₂O = 0,04in H₂O = 9,8 Pa
Air Flow Rate: 1 m³/h = 0,59 cfm

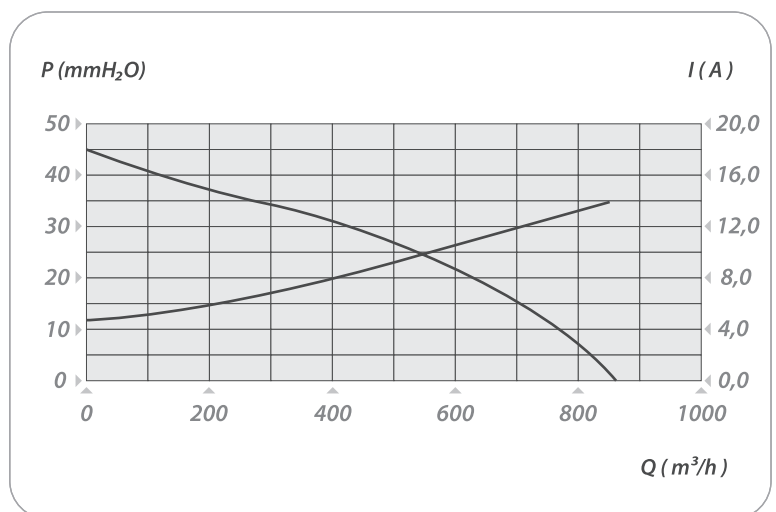

DOUBLE BLOWERS