



Part Numbers	Specifications	Applications	Features	Options
<b>6401590</b> THREE SPEED	<b>WIDTH 350 mm</b> <b>1000 m<sup>3</sup>/h</b> <b>12V</b>	HVAC Systems	High Pressure Silent Operation High Efficiency	PWM Speed Control EMC (Certified) Thermal Protector (LL) Long Life Version

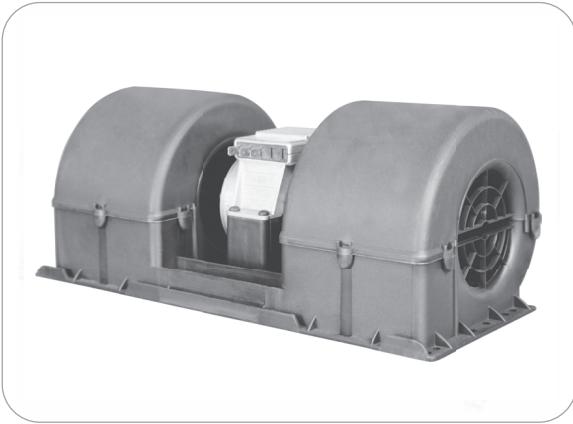


Test Voltage	V	13,0
Nominal Current	A	23,5
Nominal Speed	rpm	3.800
Max. St. Pressure	mmH <sub>2</sub> O	80,0
Max. Airflow	m <sup>3</sup> /h	1.020
Weight	kg	2,0
Airflow Rates	%	100-73-60

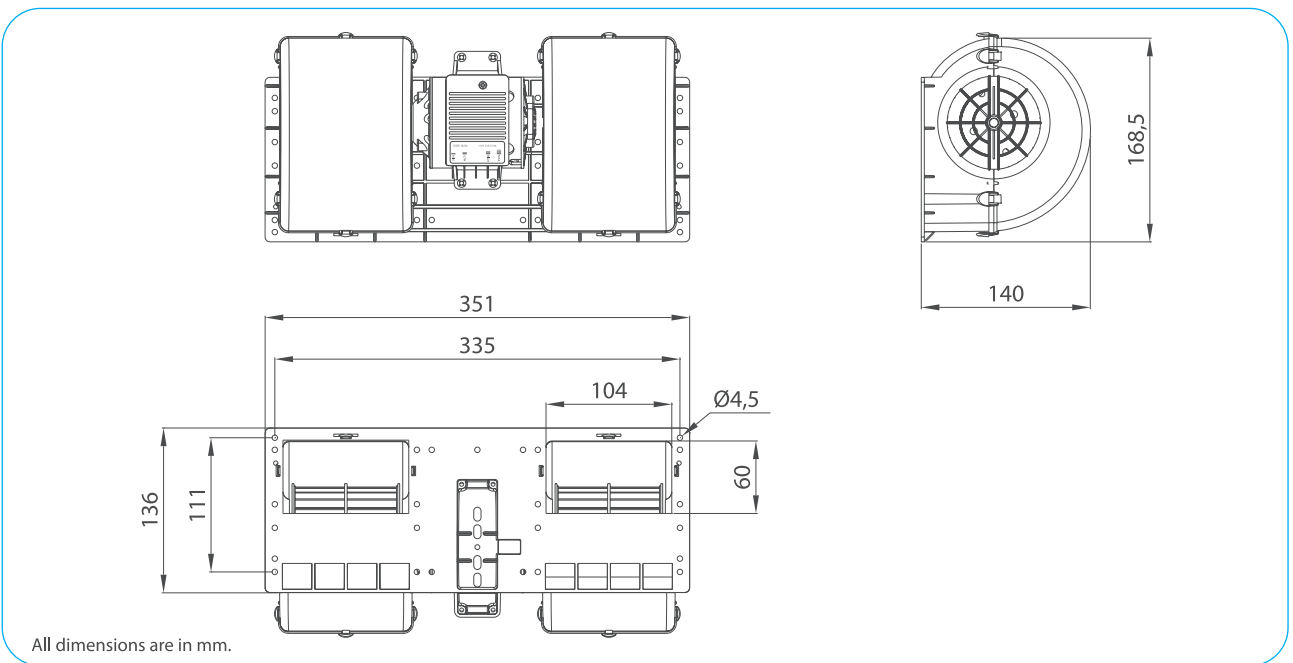

All dimensions are in mm.

TEST VOLTAGE = 13,0 VDC	Static Pressure	Air Flow Rate	Current
	mm H <sub>2</sub> O	m <sup>3</sup> /h	A
	0,0	1018,4	23,2
	5,0	988,5	22,8
	10,0	954,6	22,3
	20,0	869,1	21,0
	30,0	775,8	19,5
	40,0	698,6	18,1
	50,0	587,9	16,3
	60,0	334,0	11,8
70,0	115,5	8,9	
79,8	0,0	8,6	

Static Pressure: 1 mm H<sub>2</sub>O = 0,04in H<sub>2</sub>O = 9,8 Pa  
Air Flow Rate: 1 m<sup>3</sup>/h = 0,59 cfm

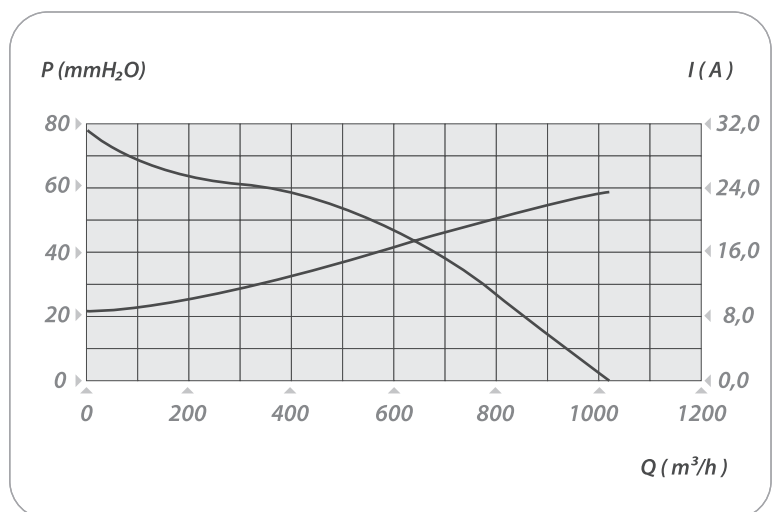

DOUBLE BLOWERS